

# LUX M12



KUBOTA Z482 | 2 CYL | 1500 RPM  
LIQUID COOLED ENGINE



VERTICAL TELESCOPIC MAST  
MAX HEIGHT | 9 m  
LIFETIME WARRANTY



RATED OUTPUT | 3.5 kVA - 230V  
OUTLET SOCKET | 1.3 kVA - 230V



FUEL CONSUMPTION | 0.55 l/h  
RUNNING TIME | 145 h



LED FLOODLIGHTS | 6 X 150 W  
ILLUMINATED AREA | 4000 m<sup>2</sup>



340° MAST ROTATION  
ADJUSTABLE FLOODLIGHTS



GALVANIZED METAL BODY  
80 µm POWDER COATING

LM SERIES



MADE IN  
ITALY



LUX TOWER   
lighting towers

# LM Series

# LUX M12

## TECHNICAL DATA

### Rough dimensions & weight

Dimensions min.	mm	2390 X 1380 X 2640
Dimensions max.	mm	2390 X 2370 X 9000
Total weight without fuel	Kg	700

### Features

Rotation		340°
Floodlight	W	6 X 150 W
Lamps type		LED
Wind stability	Km/h	80
Optional		Light sensor Main/generator switch Bunded tank


### Alternator

Model		Synchronous Linz Alumen
Frequency	Hz	50
Degree of protection	IP	23
Rated output	kVA/V	3.5 - 230
Outlet socket	kVA	1.3

### Engine

Model		Kubota Z482   2 cyl   liquid cooled
Fuel		Diesel
r.p.m.		1500
Noise Level	db at 7 meters	65
Tank capacity	l	80
Running time	h	145
Fuel consumption	l/h	0.55

### Illuminated Area // 5 lux min.

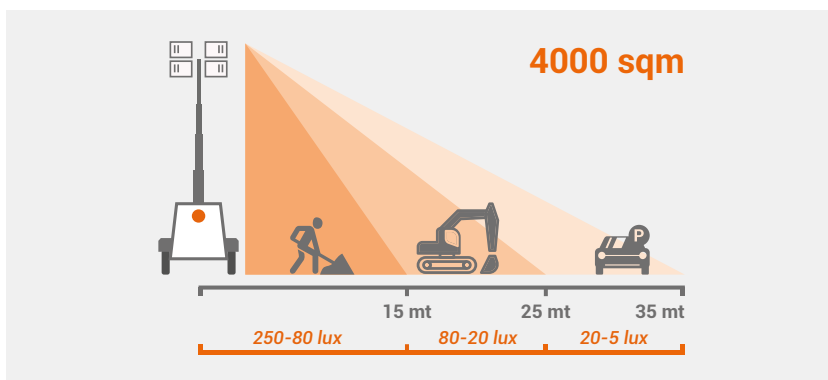

### Load Delivery

	<b>40" HC Container</b>	16 Units
	<b>20" Container</b>	6 Units
	<b>Truck</b>	
	<b>Assembled</b>	10 Units
	<b>Disassembled</b>	18 Units



Luxtower: Via Strada Nuova, 28 - 27050 Codevilla (PV) ITALY | TLF. +39 0383 365544 | Fax +39 0383 49702

LUXTOWER ongoing policy is in continuous improvement. The company reserves the right to modify the technical specifications and items described in this catalogue at any time and without notice for technical or commercial reasons. Product images are shown for information only LUXTOWER® - 2016© All rights reserved.